
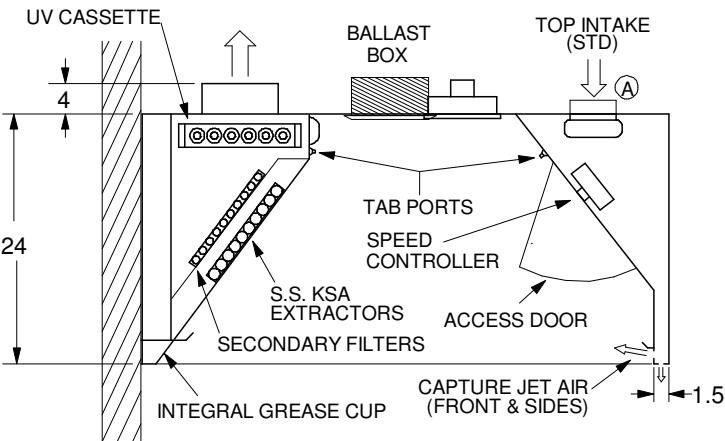


MODEL: KVE (Canopy)-UV

ALL DIMENSIONS IN inches

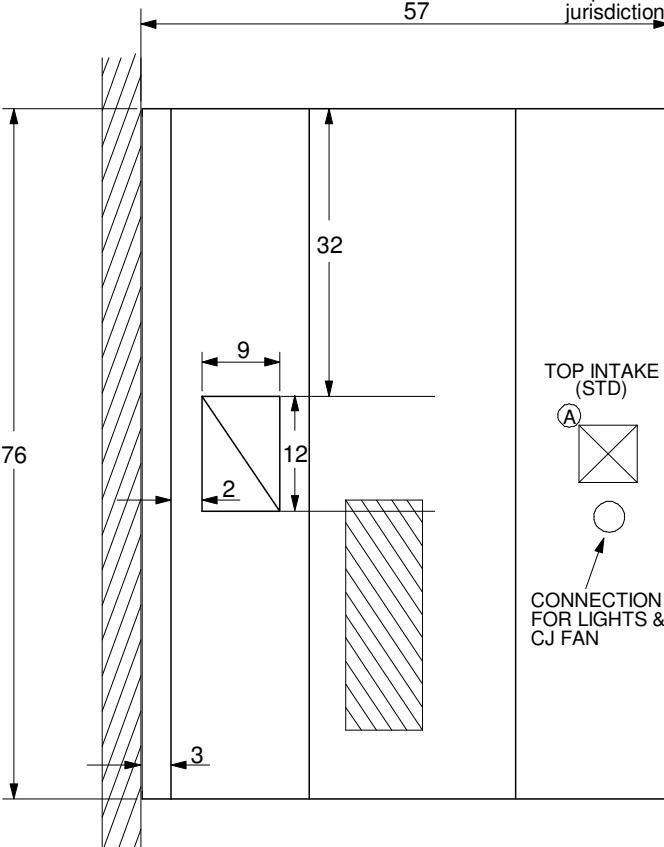

* Factory must be advised of any special requirements of the "authority having jurisdiction" at time of quote

STANDARD FEATURES

STD. KSA EXTRACTORS	3
1/2 KSA EXTRACTORS	1
LED LIGHTS	2
Ⓐ TOP INTAKE CJ FAN	X
66" UV CASSETTE	-
38" UV CASSETTE	1

OPTIONS

INCANDESCENT LIGHTS	
FLUORESCENT LIGHTS	
REC. INCAND. LIGHTS	
SWITCH PANEL	-
Ⓑ FRONT INTAKE CJ FAN	
FIRE PROTECTION	
SIDE SKIRTS	
CEILING CLOSURE HT	
BACKSPLASH HT	
INSULATED BACKSPL.	
APPLIANCE INTERLOCK	
FIRE CABINET	
PAINTED FRONT	

MATERIAL

EXPOSED:	18 GA.304 S.S.
UNEXPOSED:	18 GA.304 S.S.
FRONT:	

NOTES:



DATE

DWG. NO.

ITEM NO.

EXHAUST AIR INFORMATION *

15/12/2014

H1

CFM (Total)

T.A.B.

S.P.

PROJECT: Opa - City Centre Mall

1203
[cfm]

0.48

0.58

CAPTURE AIR INFORMATION

LOCATION: Surrey, BC

CFM

T.A.B.

SUBMITTED BY: N.O.

79
[cfm]

0.26
["H₂O]

Weight: 649 [lb]

* T.A.B. : Static pressure reading to measure the exhaust flow rate is at hot conditions. To use with cold conditions, multiply the T.A.B. value by 1.08.

S.P. : Static pressure drop of the hood (including collar)

Halton