


SPECIFICATION: Watts Drainage Products GI-200 epoxy coated inside and outside fabricated steel grease interceptor with flow rating of 100 to 600 GPM and grease capacity of 200 to 1200 LBS. Unit shall include removable baffles, code approved deep seal trap, cover securing bolt(s), removable stainless steel calibrated orifice plate and epoxy coated non-skid cover.

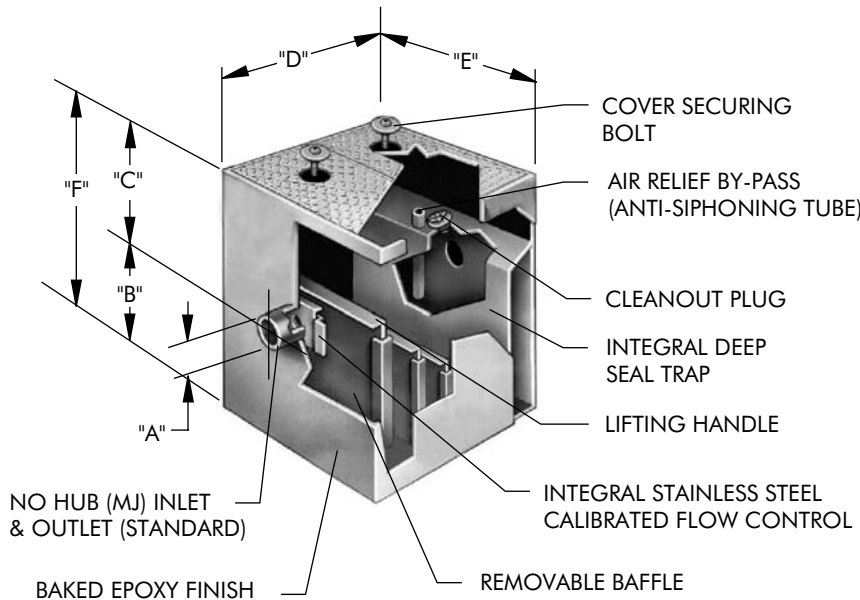

NOTE:
GI-210 two piece cover.
GI-215 to GI-260 three piece cover.

Order Code: **GI-** - -

Ex. GI-210-T-F

Flow Rate (Select One)	
Suffix	Description
210	100 GPM ☐
215	150 GPM ☐
220	200 GPM ☐
225	250 GPM ☐
230	300 GPM ☐
235	350 GPM ☐
240	400 GPM ☐
250	500 GPM ☐
260	600 GPM ☐

Options (Select One or More)	
Suffix	Description
-B	Lift Out Bucket ☐
-DI	Dual Inlet ☐
-E	Initial Supply of Biomix Powder 2 lbs ☐
-F	Flange ☐
-FC	Flange w/ Mem. Clamp ☐
-HDC	Heavy Duty Cover ☐
-IP	Injection Port (specify location) ☐
-O	Inlet & Outlet other than standard ☐
-SS	Stainless Steel ☐
-T	Threaded Connections ☐

Optional Inlet/Outlet Sizes (When -O is selected above)	
Suffix	Description
-4	4"(102) Inlet/Outlet ☐
-6	6"(152) Inlet/Outlet ☐

Cubic Capacity of Fixtures in Inches	Interceptor Catalog Number	Grease Capacity Lbs	Flow Rate GPM	A	B	C	D	E	F	DI
				Inlet & Outlet	Base to Center	Top to Center	Length	Width	Height	Between Inlet Centres
up to 30500	GI-210	200	100	4"(102)	24"(610)	10"(254)	54"(1372)	36"(914)	34"(864)	6-1/2"(165)
30501 to 46000	GI-215	300	150	4"(102)	29"(737)	10"(254)	60"(1524)	38"(965)	39"(991)	6-1/2"(165)
46001 to 61000	GI-220	400	200	4"(102)	31"(787)	10"(254)	69"(1753)	43"(1092)	41"(1041)	6-1/2"(165)
61001 to 77000	GI-225	500	250	4"(102)	37"(940)	10"(254)	74"(1880)	45"(1143)	47"(1194)	6-1/2"(165)
77001 to 92000	GI-230	600	300	6"(152)	38"(965)	10"(254)	76"(1930)	48"(1219)	48"(1219)	9"(229)
92001 to 107000	GI-235	700	350	6"(152)	39"(991)	10"(254)	79"(2007)	50"(1270)	49"(1245)	9"(229)
107001 to 122000	GI-240	800	400	6"(152)	42"(1067)	10"(254)	83"(2108)	55"(1397)	52"(1321)	9"(229)
122001 to 154000	GI-250	1000	500	6"(152)	53"(1346)	10"(254)	91"(2311)	60"(1524)	63"(1600)	9"(229)
154001 to 188000	GI-260	1200	600	8"(203)	60"(1524)	10"(254)	100"(2540)	72"(1829)	70"(1778)	12"(305)

Job Name _____ Contractor _____

Job Location _____ Contractor's P.O. No. _____

Engineer _____ Representative _____

WATTS Drainage reserves the right to modify or change product design or construction without prior notice and without incurring any obligation to make similar changes and modifications to products previously or subsequently sold. See your WATTS Drainage representative for any clarification. Dimensions are subject to manufacturing tolerances.