Sell well all over the world

ANHUI KUAITONG TECHNOLOGIES CO.,LTD.

安 徽 快 通 管 道 清 洗 科 技 有 限 公 司

Professional ▪ Excellent ▪ Win–win

ANHUI KUAITONG TECHNOLOGIES CO.,LTD.

Address : No. 1500, Beicheng Avenue, Luyang District, Hefei, Anhui,China
Tel : +86 0551-65654725/65363461
Toll-free: 400-000-9785
Fax : 0551-65654724
Web : ktgdqx.en.alibaba.com
E-Mail : anhuikt@163.com / m15555408990_1@163.com



PROFILE >>

Founded in 2009,KUAITONG was specialized in HAVC&refrigeration field for more than a decade and keeping up with customer demands all the time.Our products include central air conditioning duct cleaner, condenser tube cleaner, air preheater tube cleaner, boiler tube cleaner, air duct cleaning equipment, high pressure washer, kitchen duct cleaning brushing robot and related accessories.

Our safe and easy to use equipment help maintain critical systems to drive cost savings in a variety of fields.Kuaitong offers a large selection of cleaning equipment designed to drive the efficiency of your systems plants and facilities. Our products effectively solved the cleaning problems in tube cleaning field and other cleaning field,improved the maintenance efficiency in industrial and commercial field,not limited to building and device maintenance companies, heating system,Ventilation system,central air conditioning,chemical industry,Petrochemical Industry,power plant, manufacturing company,food processing industry,transportation and distribution system, paper industry,ship industry,maritime industry and etc.

All Kuaitong products use high quality components to ensure stable and reliable quality. We continue increase R&D investment, developed the dual shaft equipment, which could work stably under heavy-duty condition. Our shaft is specially designed to avoid water and power leaking with water inlet on shaft.

★ CERTIFICATES OF PATENT ★

★ PRACTICAL CASE ★

Anhui Kuaitong Technologies Co., Ltd. always adheres to independent research and development, innovation, .In the pipeline cleaning machine, pipeline dredging machine and chemical cleaning equipment in the field of technical breakthroughs, committed to become the cleaning industry leader, to provide our customers with quality product experience.Here are some examples of customer feedback.

KT-208: Condenser cleaning site

KT-206: Heat exchanger cleaning site

KT-956-D: Subway air duct cleaning site

KT-976: Central air conditioning duct cleaning site

KT-8001: Kitchen pipe cleaning site

KMT-010: Refrigerated water chemical cleaning site

CATALOGUE

目 录

Central air conditioning water system cleaning machine series

KT-203 Double shaft tube cleaner 01
KT-202 Removable type tube cleaner 02
KT-208 Portable tube cleaner 03
KT-101 Portable tube cleaner 04
KT-106 Multi-function tube cleaner 05
KT-HX130 Central air conditioning chemical Cleaning Circulation pump set 06
KT-HX245 Small cleaning pump set 07
KT-HX750 Chemical cleaning pump set 08
KT-925 Multifunctional household electric appliance deep cleaner 09
KT-917 Sterilizer 10

Central air conditioning wind system cleaner series

KT-836 Air duct cleaning machine with brushing & vacuuming 11
KT-836-A Air duct cleaning machine with brushing & vacuuming & video camera 12
KT-966 Central air-conditioning duct cleaning robot 13
KT-976 Air cleaning and vacuuming robot 14
KT-956-D Cleaning and vacuuming robot 15
KT-916-C Cleaning of air duct dust collection boxes 16
KT-926 Flexible shaft cleaner 17
KT-988 Detection robot 18
KT-988-B Detection robot 19

Condenser tube cleaner series

KT-206 Condenser tube cleaner 20
KT-306 Condenser tube cleaner 21

Boiler pipe cleaning machine series

KT-302 Boiler pipe cleaner 22
KT-212 Boiler pipe cleaner 23

Kitchen duct cleaner series

KT-8001 Kitchen fume duct cleaner 24

Flexible shaft accessories for cleaning machine

The new flexible shaft 25
Flexible shaft for blocked tube 26

Product Advantage 产品优势

1、Double shaft Design
The main engine can drive the main shaft and the auxiliary shaft at the same time, rotate and spray water at the same time to complete the cleaning work.Designed for cleaning companies,suitable for heavy workload, tight cleaning period and other occasions, power up to 750W, strong power, high efficiency.

2、Detachable flexible shaft
The traditional flexible shaft can not be removed and stored after use, and the shaft life is short. We have introduced a removable shaft, which can be removed and dried after completion. The soft shaft can be used for a longer time.

3、Inlet water directly on the flexible shaft
Direct water inlet on the soft shaft breaks the international problem of difficult sealing of direct water inlet on the main engine and completely avoids the occurrence of water inlet accident due to seal damage inside the main engine.

Product Parameters 产品参数

Voltage	Power	Speed	Weight	Size		
V	W	r/min	kg	height	width	depth
220v/50hz	750	0-1400	49	1045mm	335mm	540mm

The shell is made of 304 brushed stainless steel, permanent stainless steel, movable design, imported core components, stable quality, welcomed by domestic cleaning companies, accounting for 80% of the domestic market share, and sold to Europe, America and southeast Asia.

Cleaning >>

Cleaning the scene>>

Add stainless steel sheath on the soft shaft, which can be treated to block the pipe, and the cleaning force is greater

Detachable flexible shaft shaft sheath can be extracted for maintenance to extend the service life of the flexible shaft

All steel quick connection water pipe joint, 5 seconds quick connection

The newly upgraded soft shaft and tool head are very effective in blocking the pipe. The tool head has no harm to the inner wall of the pipe.

Product Advantage 产品优势

1、Detachable flexible shaft
The traditional flexible shaft can not be removed and stored after use, and the shaft life is short. We have introduced a removable shaft, which can be removed and dried after completion. The soft shaft can be used for a longer time.

2、Double control line
Common line & standby line, If you have a urgent schedule, you can use an standby line.

3、Inlet water directly on the flexible shaft
Direct water inlet on the soft shaft breaks the international problem of difficult sealing of direct water inlet on the main engine and completely avoids the occurrence of water inlet accident due to seal damage inside the main engine.

Product Parameters 产品参数

Voltage	Power	Speed	Weight	Size		
伏	W	r/min	kg	height	width	depth
220v/50hz	375	900	27.5	405mm	225mm	400mm

KT-202 Handcart type pipeline cleaner to make pipeline cleaning work more simple, the model is suitable for 1/2 "- 1" pipe cleaning scope, apply to the condenser, cooler, evaporator, heat exchanger, such as easy to jam, easy to pollution of the machine, the brush head speed up to 900 r/min, at the same time, the water injection from the soft shaft which will easily clean pipeline.

KT-202 Standard Packing list 标配

The new type has two detachable soft shafts

10 nylon brushes of the same length

1 stainless steel coupling

1 /20 meters copper connector quick connection 1 pipe

The Scene Of Construction 现场施工图



Product Introduction 产品简介

Inlet water directly on the flexible shaft
Inlet water directly on the flexible shaft completely avoiding the accident of water inside the main engine due to the damage of seals.

The shell is made of 304 drawn steel
Plus spray molding process, permanent rust.

Foot switch
easy to step on, can start or stop

Detachable flexible shaft
The shaft axis can be taken out for maintenance to extend the service life of the flexible shaft.

Same long brush design
No damage to the pipe

Leakage protection power cord

(This picture is a sketch: As the product is constantly updated, please refer to the actual product.)

Product Parameters 产品参数

Voltage	Power	Speed	Weight	Size		
V	W	r/min	kg	height	width	depth
220v/50hz	375	900	19	185mm	335mm	355mm

Product Introduction 产品简介

1、Speed is adjustable

the adjustable speed can be adjusted from 0 to 1400 RPM. Under normal working conditions, the speed can be adjusted to the intermediate state, which is about 900 RPM.

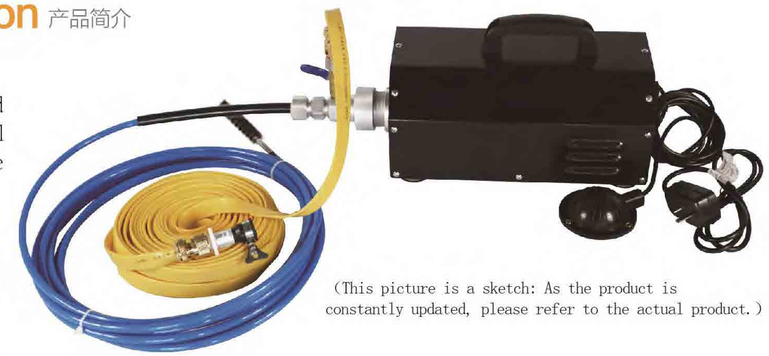

(This picture is a sketch: As the product is constantly updated, please refer to the actual product.)

2、Inlet water directly on the flexible shaft

Direct water inlet on the soft shaft breaks the international problem of difficult sealing of direct water inlet on the main engine and completely avoids the occurrence of water inlet accident due to seal damage inside the main engine.

3、Detachable flexible shaft

The traditional flexible shaft can not be removed and stored after use, and the shaft life is short. We have introduced a removable shaft, which can be removed and dried after completion. The soft shaft can be used for a longer time.

Product Parameters 产品参数

Voltage	Power	Speed	Weight	Size		
V	W	r/min	kg	height	width	depth
220v/50hz	375	0-1400	13	170mm	200mm	350mm

Cleaning the scene

Cleaning

Application 适用范围

KT-101 Portable type pipeline cleaner is suitable for all kinds of internal fouling treatment and also for internal rust and scale removal treatment of condenser, evaporator, heat exchanger and other pipelines.The machine can quickly and efficiently remove dirt, slime, scale, rust scale inside the pipe. It has high effect, low cost and no damage to the pipe.

Product Introduction 产品简介

1、Speed is adjustable

the adjustable speed can be adjusted from 0 to 1400 RPM. Under normal working conditions, the speed can be adjusted to the intermediate state, which is about 900 RPM.

2、Inlet water directly on the flexible shaft

Direct water inlet on the soft shaft breaks the international problem of difficult sealing of direct water inlet on the main engine and completely avoids the occurrence of water inlet accident due to seal damage inside the main engine.

3、Detachable flexible shaft

The traditional flexible shaft can not be removed and stored after use, and the shaft life is short. We have introduced a removable shaft, which can be removed and dried after completion. The soft shaft can be used for a longer time.

4、High- pressure gun flushing

When the pipeline is dredged, the dirt outside the pipeline can be washed with a high-pressure water gun. The maximum amount of 60bar of high-pressure water can be provided for surface washing, and the remaining residue in the pipeline can also be cleaned.

5、One cleaning machine has two cleaning modes

One main engine two ways of usage , one is self-priming mode, can be equipped with high pressure water gun flushing;The other is tap water flushing .

Tap water flushing

Self-priming mode

Product Parameters 产品参数

Model	Voltage	Normal Power	High-pressure power	Weight	Pressure	Spray water capacity	Speed	Size
KT-106	220V	370W	1000W	25kg	60Bar	5L/min	0-1400r/min	400*265*410mm

Product Details 产品细节

High-pressure water gun

Speed Regulator

Cooling Fan

Product Name:Central air conditioning chemical cleaning circulation pump set

Product Details 产品细节

Electric machine are made by100% copper , cold rolled silicon steel sheet, power standard, not easy to burn.

The plastic protective cover prevents corrosive liquid from being ejected during the operation of the pump, which can be dangerous.

Practical guard plates are designed on both sides of the folding drum to make the circulating pump station more stable

Product Advantage 产品优势

1. Large copper coil, not easy to burn.
2.Stainless steel rotor, new die-casting moisture-proof and rust-proof process, precision processing and casting molding, stable operation.
3.Pump head external with oil seal, using EPDM water seal corrosion resistance and leakage prevention.
4.Folding drum adopts triangle stability principle,make front and rear reinforcement baffle more stable.

Product Parameters 产品参数

circulating pump					Folded size of folding bucket
Voltage	Power	Water flow capacity	Distance of delivery	inlet and outlet diameter	long*wide*high
380/220V	0.75KW	$4m^3/h$	11m	32*25mm	110CM*59CM*10CM

Product Overview 产品概述

The KT-HX245 small cleaning pump set is mainly used for cleaning the condenser of central air conditioning. The water flow is continuously cycled between the condenser and the small cleaning pump set by the pipeline. This product can be resists acid and base, also can add medicine to clean, it can work with hot or cool liquid when in low temperature weather, heat to the temperature suitable for cleaning agent cleaning effect is better.

Product Advantage 产品优势

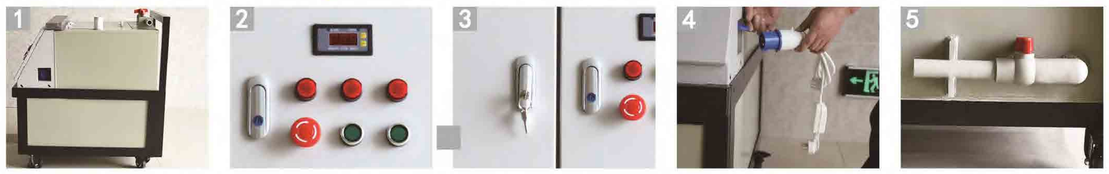

1. The fixed frame is trolley designed ,move easily and save manpower.
2. The heater has a button, easy be understood and operated, the visual reading is convenient to know and adjust the temperature.
3. The design of the two doors of the heater is convenient for opening and closing. The reinforcement of the safety lock ensures the safety during operation.
4. The side of the machine is equipped with a waterproof power jack. Just point the three-core waterproof and explosion-proof power cord plug into the jack with one key, which is convenient and safe.
5. A water outlet is set on the side of the machine to help remove sewage after usage and make the overall operation more smooth.

Product Parameters 产品参数

Voltage	Clean Pump Power	Heating Power	Water flow capacity	Distance of delivery	Weight	Solution tank volume	Solution box volume
220V	750W	3KW	$6m^3/h$	13m	70kg	245L	900mm*610mm*945mm

Product Overview 产品概述

KT-HX750 Chemical cleaning pump set is specially designed for the central air conditioning condenser cleaning, with the function of circulation cleaning, the equipment can work in cold or hot condition , in low temperature weather, heating to the appropriate temperature cleaning machine cleaning effect is better, or over acid and alkali.

Product Parameters 产品参数

Voltage	Clean Pump Power	Heating Power	Water flow capacity	Distance of delivery	Solution box volume	Solution box material
220V	2.2KW	9KW	$10m^3/h$	10m	1000*750*1000mm	PP

KT-925 Multifunctional household electric appliance deep cleaner

(Duct cleaning of fan tray for central air conditioning)

Product Overview 产品概述

Kt-925 is mainly used for central air conditioning fan coil cleaning. It also can clean all household appliances.Its functions include lighting / voice / multifunctional spray gun / steam / cold / hot / ozone / pulse / dry / humidity regulation / temperature regulation /pressure regulation / etc.

Product Advantage 产品优势

1. With 10kg pressure high speed pure copper motor , high voltage variable frequency adjustable water pump has the advantages of continuous water supply, high pressure, safety.
2. Microcomputer programming, imported integrated circuits in Taiwan.
3. ABS integrated molding box, the overall weight is less than 15 kg, portable, can be soaked in water, durable 300 kg, explosion-proof, corrosion protection .
4. Upgrade multi-functional spray gun with spotlights, voice broadcast, machine control and device mode adjustment.
5. Touch panel waterproof, no hidden water leakage, high temperature resistance, super acrylic material, simple operation.

PARAMETER LIST					
Steam parameter		Hot/cold water parameter		disinfection parameter	
Items	numerical value/units	Items	numerical value/units	Items	numerical value/units
voltage	Ac-220V-50Hz	voltage	Ac-220V-50Hz	voltage	110~240(V)
Power	3300W	Power	3300W	Blowing rate	51~150m²/h
Steam temperature	100℃-120℃	Suction	Max 1.5m	Power	8W
Max continuous operation time	180min	range	Max 6m	sterilizing rate	99.99 (%)
Steam pipe length	330cm	Rated pressure	0.3-0.6Mpa	algae removal	99.99 (%)

KT-917 Sterilizer

Product Overview 产品概述

Kt-917 is specially designed for central air conditioning air duct disinfection, flexible, corrosion resistant, fine atomization, dust far, the air duct disinfection work is very friendly

Product Parameters 产品参数

type	Voltage	power	Spray volume	Static wind dust	n.w/g.w	tank capacity	long*wide*high
KT-917	220V	1000W	470ml/min (adjustable)	6-8m	2.35kg/3.34kg	5L	560*240*320mm

KT-917 Packing list 标配

Pressure relief strap

Anti-pressure foam pad

KT-836 Air duct cleaning machine with brushing & vacuuming

Packing list

device host

dust absorption

Trapezoidal brush and Round brush

Cleaning brushes

you can select Trapezoidal brush and Round brush as you want .

Product Advantage 产品优势

1. Remote control
2. Flexible shaft protection function when soft shaft stucked in the tube, automatic stoped flexible shaft.
3. High power motor can be used with flexible shaft with different diameters, tube diameter range 50-800mm
4. The motor has large power which can be matched with flexible shafts of different diameters from 100 to 500 mm.
5. Flexible shaft with steel sheath. High temperature resistance, abrasion resistance, strong hardness, can bend.
6. Drive shaft is 65 manganese steel spring material, strong torsion, spiral design can be arbitrarily bent.
7. Running in both directions.
8. double suction, more fast.

Product Parameters 产品参数

Model number	KT-836	Main unit dimension	460mm*402mm*740mm
Voltage	220V	Suitable duct diameter	100mm-500mm
Power	2800W	Rotating speed	0-1400r/min
Main unit weight	43.5kg	Flexible shaft weight	14kg

Product details

Operation pane

universal wheel

quick connection

KT-836-A Air duct cleaning machine with brushing & vacuuming

9 "HD display Screen

High-definition video camera

you can select Trapezoidal brush and Round brush as you want .

Trapezoidal brush and Round brush



Cleaning brushes

Product Advantage 产品优势

1. The host computer is equipped with a 9-inch hd display, full-screen monitoring design, high pixel, and clear video.
2. Equipped with high-definition video camera on the flexible shaft, 360 degrees without dead Angle cleaning.
3. Equipped with a remote control, it can be operated remotely.
4. With the flexible shaft protection function, when the front cleaning brush of the soft shaft appears stuck in the pipe, the machine will automatically protect the flexible shaft and make the flexible shaft stop working.
5. The rotating speed can be adjusted from 0 to 1400r/min, which is suitable for dust cleaning in different pipelines. The maximum value is up to 1400r/min.
6. Flexible shaft with woven mesh sheath, wear resistance, high temperature resistance, and can be bent.
7. Forward and reversed rotation configuration, no dead Angle cleaning.
8. Dual suction design of vacuum cleaner. Two vacuum cleaners can be opened at the same time, twice as much as ordinary vacuum cleaners.

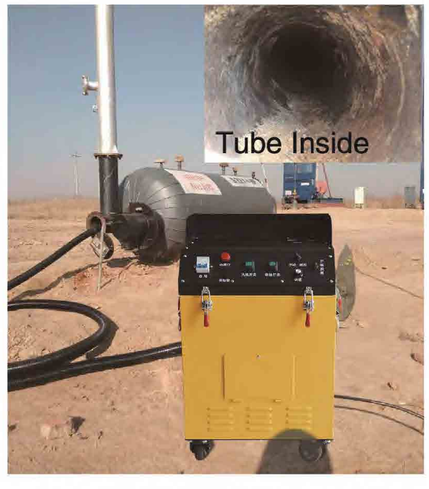

The scene of construction

Product Parameters 产品参数

Model number	Voltage	Power	Main unit weight	Flexible shaft weight	speed	Suitable duct diameter	Size
KT-836-A	220V	2800W	45kg	19.7kg	0-1400r/min	100mm-500mm	460mm*402mm*762mm

Product Overview 产品概述

KT-966 is specially developed for dust-heavy, difficult-to-clean and difficult-to-enter air duct.

Product Advantage 产品优势

1、The lifting robot adopts the universal wheel design, which can move forward and backward, left and right, and rotate 360 degrees. There is no need to manually enter the air duct for intelligent cleaning.

2、The control cabinet is equipped with a HD display screen and the video is clearly visible.

3、The robot is equipped with front and rear high-definition surveillance cameras. There is no dead Angle cleaning at 360 degrees and no need to worry about the black inside the air duct, which cannot be seen or swept.

4、Free lifting design and super large cleaning nylon brush robot height and cleaning width can be adjusted according to needs, three cleaning brushes rotate at the same time, side wall and upper and lower pipe cleaning at the same time without dead Angle.

5、Portable data line and pushcart design .The data line hovers over the trolley, making the trolley beautiful and generous overall. The trolley can be pushed and pulled for convenient transportation. The pushcart pull rod is collapsible and easy to carry.

6、Hand-held reinforced cabinet, never conductive.Control cabinet with portable design, easy to carry, the overall thickening design of the cabinet, can bear 100 kg, continuous high bearing no pressure.

Before stretching

After stretching



Product Parameters 产品参数

Current	Voltage	Power	Weight	Speed	Clean the distance	Diameter of data lin	Pipe diameter range
8A	220V	300W	29kg	5-9m/min	＜100m	13mm	width ≥500mm 500mm≤height≤800mm

(This picture is a sketch: As the product is constantly updated, please refer to the actual product)

Product Advantage 产品优势

1. Intelligent robot cleaning, cleaning while vacuuming, the robot vacuuming up and down at the same time, the operation rate is higher.
2. The host machine is equipped with a 9-inch HD screen and a full-screen monitoring design, so that there is no dead space for cleaning.
3. Front and rear 165° wide-angle HD cameras make cleaning work easy;Dual channel video display, real-time recording, convenient for archiving and customer acceptance.
4. LED strong light spotlights, no fear of darkness, easy dust removal.
5. The robot is supplied with 24V low-voltage power to ensure work safety.
6. Pen push rod pushes the brush up and down freely.
7. Dual suction design of vacuum cleaner, two pressure motors working at the same time, faster suction speed.
8. 2800W high power, pure copper large coil, can clean 200mm-500mm diameter pipe diameter.

Product details

Cooling Fan

Universal wheel design

Product Parameters 产品参数

Model	KT-976	Control Cabinet Weight	43kg	Brushing Speed	260r/min
Voltage	220V	Robot Weight	11kg	Crawling Speed of Robot	0.3m/s
Power	2800W	Vacuum Tube Length	15m	Display Screen Size	9 inch
Robot Size	650mm*310mm*160mm (Brush at the bottom)		Robot Size	600mm*310mm*330mm (when brush is at the top)	
Control Cabinet Size	480mm*500mm*700mm		Suitable duct diameter	200-500mm	

KT-956-D Cleaning and vacuuming robot

(Used to clean the subway)

Product Advantage 产品优势

1. Intelligent robot clean and vacuum simultaneously.
2. The host machine is equipped with HD display screen, full-screen monitoring design.
3. A high pixel surveillance camera is set up in front of the robot to clean pipes at 360° .
4. The handle 360° witch can turn to any direction.
5. Spiral suction shaft can be bent and folded at will, with built-in steel wire and cable to prevent disconnection and breakage, which can prevent the robot from being dragged out in case of sudden failure in the air duct.
6. Blunt the four edges and corners of the robot to prevent the robot from getting stuck by the vertical bars in the subway air duct, and add a guide wheel at the four corners to prevent the inner wall of the air duct from being scratched.

Product Parameters 产品参数

Model	KT-956-D	Main Unit Weight	25kg
Voltage	220V	Robot Weight	6kg
Voltage	1.2KW	Cleaning Distance	10m
Vacuum capacity	7L	Crawling speed of robot	3.5m/min
H*W*D	450mm*530mm*610mm (Main Unit Size)		
Applicable Tube Diameter	Width≥190mm, Height≥70mm		

KT-916-C Cleaning of air duct dust collection boxes

Product Parameters 产品参数

Model	Voltage	Power	Blowing rate	Length of air duct	Diameter of Air duct	Height of ceiling	Weight of Device host	Weight of air duct	Size of divice host
KT-916-C	220V	2.2KW	4000m³/h	5m	≤500mm	2.6m-3.5m	82kg	6.1kg	810*1330*900 mm

Product Advantage 产品优势

1.High quality centrifuge fan, polymer sound-absorbing material, low noise.
2. 2.2kw high power, fast speed,Reduce working time.
3.Innovative filter bag design, better filter air.
4.Spring type hose design, easy to stretch.
5.Universal wheel design, easy to move.

filter package

Main Unit

KT-926 Flexible shaft cleaner

Application 适用范围

Kt-926 is suitable for dust cleaning inside ducts, central air conditioning ducts, flour mill pipelines, chemical plant pipelines

Product Advantage 产品优势

1. Adjustable speed, suitable for different types of pipe.
2. Speed up to 1400 RPM, high speed descaling better.
3. With shaft protection function, when shaft stucked in the pipe the shaft will automatically stop.
4. High power motor, can be used with soft shaft with different diameters, duct diameter range 50-800mm
5. flexible shaft with steel sheath. High temperature resistance, abrasion resistance, strong hardness, can bend.
6. The drive shaft is made of spring made of 65 manganese steel strong torque and can be bent freely
7. Forward and reverse rotation design,clean thoroughly.

Product Parameters 产品参数

Model	KT-926	Size of Main engine	440mm*240mm*320mm
Current	7A	Cleaning pipe diameter	50mm-800mm
Votage	220V	Speed	0-1400r/min
Power	550W	n.w/g.w	35/45KG

Standard Packing list 标配

1 Main unit 1 flexible shaft 3 nylon brush

KT-988 Detection robot

Standard Packing list

control cabinet

Data line and cart rack

robot

Product Advantage 产品优势

1、 Robot is used for all kinds of air duct detection. It is used for collecting dust samples in all kinds of air ducts, testing bacteria and detecting air quality.
2、 With display screen, real-time HD image.
3、 Front and rear lights design so you don't have to worry about the black inside the air duct.
4、 portable cable and trolley cart design, rod can push and pull , convenient to move.
5、 portable non-conducting reinforced box design.

Product Parameters 产品参数

Model	KT-988	Cabinet size	480mm*350mm*220mm
Voltage	220V	Robot Size	286mm*240mm*113mm
Power	200W	Cart diameter	38cm
Data line length	20m	Cart Height	73cm (highest)

Product details

HD Display Screen

HD Video Camera

LED Light

(This picture is a sketch: As the product is constantly updated, please refer to the actual product.)

Product Overview 产品概述

KT-988-B is an artificial intelligence detection robot, which is used for collecting dust samples in various air ducts, inspecting bacteria and detecting air quality.It is small in size and move freely in a dark and narrow space. The overall unique mechanical structure design brings you a shock of science and technology. The movement of the five-axis robot arm can rise and fall freely, and at the ame time, it also has the function of camera and lighting, so it can freely shuttle through the pipe.

Product Advantage 产品优势

1. Five-axis robot arm movement. The robot arm adopts two modes, one is basic mode, the other is advanced mode;Basic mode uniaxial motion, advanced mode five-axis motion (moving in the coordinate system).
2. DH model algorithm is adopted for more accurate and flexible use.
3. The maximum opening of the robot claw is 170mm, which can rotate in an axial direction of 180 degrees.
4. 165-degree wide Angle HD camera, 360-degree no dead Angle monitoring.
5. The robot is equipped with LED strong illumination spotlights .
6. The control cabinet is equipped with a large 9-inch HD display screen with high pixels and the video is clearly visible.
7.Industrial servo motor is adopted, with accurate Angle and precise movement。
8.portable cable and trolley cart design, rod can push and pull , convenient to move.

Screen

Camera

Robot Claw

LED Light

Cart data line

Remote Control

Product Parameters 产品参数

Model	KT-988-B	Cabinet size	480mm*350mm*220mm
Voltage	220V	Robot Size	225mm*280mm*103mm
Power	200W	Cart diameter	38cm
Data line length	20m	Cart Height	73cm (highest)

Product Overview 产品概述

The KT-206 pipeline cleaning machine is specialized in all kinds of pipeline internal dirt treatment, the scope of use: this model is suitable for air preheater, condenser/air preheater/gas primary cooler and other heat exchange tube inner surface cleaning and polishing of various pipeline production enterprises.

The scene of construction

Product Advantage 产品优势

1. Flexible shafts of both sizes can be used together, and the inner diameter range of dredging pipe is 6.35mm-800mm
2. with 3kW high power, so the operation efficiency is higher and faster.
3. Adjustable speed (0-2800 RPM)
4. Equipped with torque regulator, different flexible shafts can be adjusted at different torques to protect the soft shafts and extend their service life.
5.Equipped with blocking soft shaft, it can deal with blocked pipeline.
6. One cleaning equipment host can drive two flexible shafts at the same time. One is the main shaft and the other is the auxiliary shaft.When the main shaft is in working state, the secondary shaft can work or not work, the two do not interfere with each other, can be arbitrarily stopped and run.

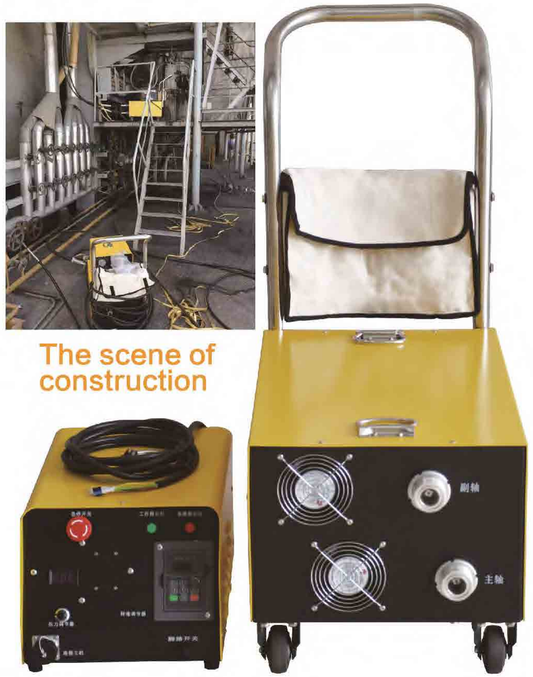

(This picture is a sketch: As the product is constantly updated, please refer to the actual product.)

Product Parameters 产品参数

Voltage	Power	Speed	Weight	Main unit size		
V	W	r/min	kg	height	width	depth
380v/50hz	3000	0-2800	80kg	660mm	420mm	400mm

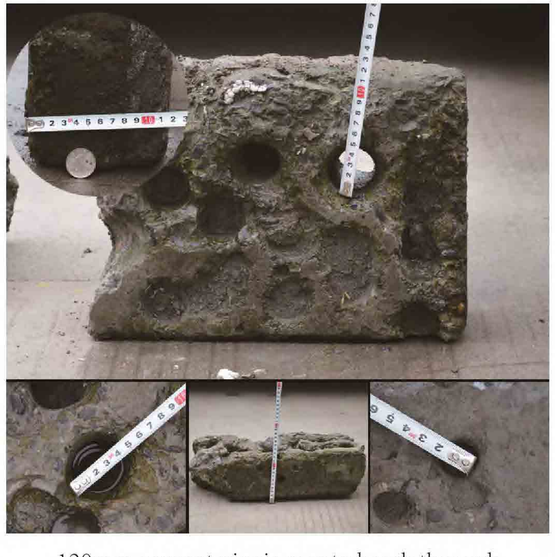

120mm cement pier is easy to break through

Product details

Double shaft efficiency multiplier cleaning. Two flexible shaft can operate at the same time or single flexible shaft also can operate. >>

^^

large amount of water treatment blocked pipeline excellent for copper pipe and plastic pipe without any damage.

The torque can be adjusted to extend the service life of the flexible shaft .

vv

<< Adjustable Speed 0-2800r/mim

Note: KT-206 pipeline cleaning machine can match the flexible shaft of 6mm-27mm, the cleaning pipe diameter is 6.35mm-800mm, and the 3KW super power is a professional gas primer pipeline cleaning machine.

Product Advantage 产品优势

1.Both hand and remote control switch.
2. The added shaft protection device can protect the shaft from being broken during the usage and prolong the service life of the shaft.
3. 4KW Large power with great strength easily to deal with blocked large pipeline, can dredge 50mm-800mm pipe .
4. The speed can be adjusted (0-3000 RPM) according to different working conditions.
5. Equipped with torque adjustment instrument, different soft shafts can be adjusted with different torques to protect the stress degree of soft shafts and extend their service life.
6. Equipped with imported blocking flexible shaft applicable to both dry and wet condition , can deal with blocked pipe.
7. Flexible shaft directly inlet the water

(Newest version)

(Special for large pipe)

Product Parameters 产品参数

Model	KT-306	Applicable Diameter Tube	50mm-800mm
Voltage	380V	Weight	121kg
Power	4KW	Main unit size	770mm*460mm*410mm
Rotate Speed	0-3000r/min	Cabinet Size	450mm*320mm*260mm

Product Overview 产品概述

The KT-306 pipeline cleaning machine is specialized in all kinds of large pipeline internal dirt treatment. Application: this model is suitable for air preheater/power plant condensers/gas primary cooler and other heat exchanger internal surface cleaning and polishing.When the cleaning brush head or tool head is rotating at high speed, water will also be ejected at the same time to flush loose dirt and make the pipeline thoroughly clean, which can quickly and efficiently remove dirt, mud, scale and rust inside the pipeline;The machine has high efficiency, low cost and no harm to the pipe.

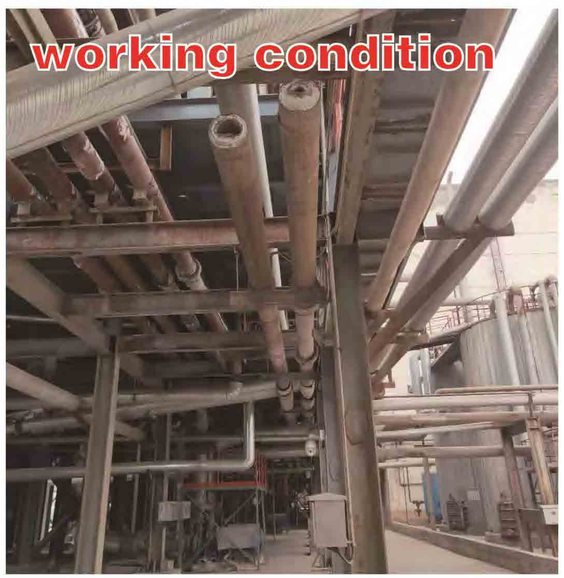

Product Advantage 产品优势

1. With split type design and small volume, it can be smoothly go into the boiler through the manhole.
2. Adjustable torque, which can be adjusted according to the size of the flexible shaft to protect the flexible shaft and extend its service life;Completely change the traditional torque transmission mode and the flexible shaft no longer distortion.
3. Adjustable speed (0-1400 RPM) to meet your various needs.
4. It is made of new stainless steel jacket and can deal with blocked pipe.
5. Inlet Water directly on the flexible shaft, can brush while spraying water.
6. Special flexible shaft for pipeline cleaning machine, the connection of water pipe, flexible shaft and faucet is in the form of quick connection. It is convenient for workers to install and connect the water pipe directly by inserting it.

Product Parameters 产品参数

Model	KT-302	Speed	0-1400r/min	Applicable Tube Diameter	¢16 - ¢200mm
Power	1.5KW	Weight	44kg	/	/
Votage	220V	Main Unit Size	62cm*23cm*35cm	Control Cabinet sise	36cm*20cm*17.5cm

KT-212 Boiler pipe cleaner

Product Overview 产品概述

The KT-212 boiler pipeline cleaning machine is a special equipment designed for cleaning boiler tubes.This product is easy to use, one person can dredge 2-5 pipes every minute, and then the hard plug can be smooth dredge, the equipment in the process of construction using the soft shaft toughness and the connection of the knife to scrub the dirt in the pipeline, it belongs to the type of dry cleaning, but you can also add water to clean.

Product Advantage 产品优势

Professional for all kinds of small and medium-sized boiler smoke tube internal dirt treatment, use without water. Small machine, easy to carry, the machine can come and go from the boiler inlet, cleaning can put the equipment into the boiler interior, single person can complete the cleaning work independently, can work continuously for 24 hours, the soft shaft of the equipment with high quality wear-resisting spring jacket and carbon steel axis, durable.

Product Parameters 产品参数

Model	Power	Voltage	Speed	Weight	Appearance	Size
KT-212	1.5KW	380V	900	25KG	Yellow	40cm*25cm*22cm

KT-8001 Kitchen fume duct cleaner

(This picture is a sketch: As the product is constantly updated, please refer to the actual product.)

Product Advantage 产品优势

1. The innovation of pipeline cleaning machine with heavy duty steel wire brush configuration, easy clean oil, at the same time also can spray detergent scrub, dissolve oil, synchronization, high-temperature water to wash the oil.
2. Brushing, medicament to wash, hot water washing at the same time will be strong decontamination, and efficient.
3. Soft nylon brush brush and fuzz nylon and stainless steel wire brush optional .
4. Spraying alkaline cleaner quickly dissolve dirt .
5. Self-priming pump anti-corrosion material acid and alkali resistant.
6. Brush while cleaning the same time can quickly and thoroughly clean dirt, removal rate of more than 90%.
7. Self-priming pump has been equipped on the machine without the need for another self-priming pump.
8. The brush connection mode adopts pin mode to ensure that the brush with forward and reverse rotation will not fall off.

Product Parameters 产品参数

Model	KT-8001	Main Unit size	1000mm*580mm*1000mm
Voltage	220v	Electric Current	5A
Power	1.5kw	Rotate Speed	0-1400r/min
Cleaning Diameter	200mm-800mm	Foam spray volume	93kg

Product Overview 产品概述

KT-8001 oil pipe cleaning machine is new on the market, can spray while cleaning, the pipe can also be out of high temperature and high pressure water, oil cleaning agent, high temperature and high pressure water, fast through cleaning brush, the three-pipe effect is excellent.

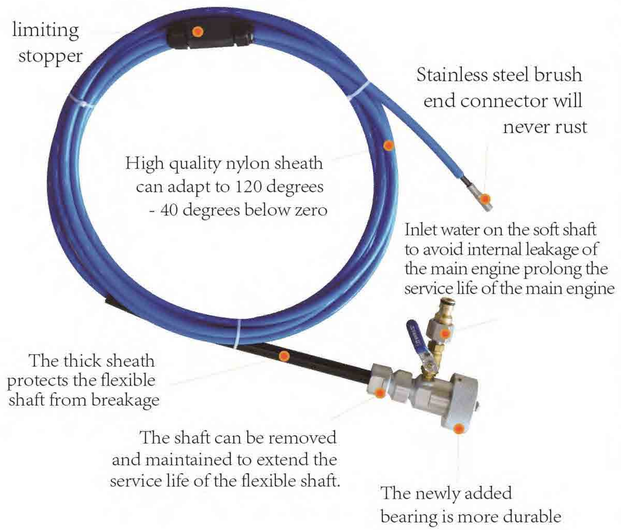

Product Parameters 产品参数

axis material	Carbon steel and stainless steel for customers to choose
Joint material	304 stainless steel
Sheath Material	Imported nylon tube
Length	7.6 meters (Customized)
Shaft Diameter	6mm/8mm/10mm/12mm
Rotating speed	Cleaning Diameters, 6.35mm-25.4mm
Applicable Brush materials	Nylon brush, copper wire brush, wire brush, alloy steel tool head
Applicable Tube	Copper Tube, Stainless steel Tube, Cast iron Tube, Plastic Tube
Application	Condenser cleaning machine, gun machine, ground source heat pump cleaning machine
warranty period	1 year

Product Overview 产品概述

1.Flexible shaft relief device

2.Flexible shaft removable

3.Inlet water directly on the flexible shaft

The flat brush design does no harm to the pipe

Note: The diameters of brushes and knives should be slightly smaller than the inner diameters of pipelines to avoid damage to pipelines. All brushes and knives can be customized according to customer requirements.

Matching Brush Size

Diameters	inch	1/4	5/16	3/8	7/16	1/2	9/16	5/8	13/20	11/16	3/4	13/16	7/8	15/16	1
	mm	6.5	7.5	9.5	11.1	12.7	14.3	15.9	16.5	17.5	19.1	20.6	22.1	23.8	25.4

Carbon steel pipe filled with cement mortar

Ease dredge with knife tip

It does no harm to dredge the plastic pipe

Matching Accessories

External thread cutter head

Internal thread cutter head

Expansion head

Panicle brush

Stainless steel wire brush

Copper wire brush

Product Parameters 产品参数

axis material	Carbon steel and stainless steel for customers to choose
Joint material	304 stainless steel
Sheath Material	Imported nylon tube
Length	7.6 meters (Customized)
Shaft Diameter	10mm/12mm/16mm/22mm/27mm
Rotating speed	Cleaning Diameters, 6.35mm-25.4mm
Applicable Brush materials	Nylon brush, copper wire brush, wire brush, alloy steel tool head
Applicable Tube	Copper Tube, Stainless steel Tube, Cast iron Tube, Plastic Tube
Application	KT-206/KT-306/KT-203/KT-302
warranty period	1 year